



An Electronic Transaction Company



Point-of-Sale

**Equipment
Supplies
Accessories
Repairs**

Customer Support

713-629-0906

Hours:

7:00 am to 7:00 pm

M-F



Bancnet Technical Support Services

www.banc.net

Open 24 Hours

Scroll Down or click on thumbnails to view Brochure or User Guide pages

Description

The **NURIT 2070** is an advanced, lightweight portably designed wireless credit/debit card and check authorization POS/EDC terminal. Dependable and independent operation is made possible by use of radio communications linked to a wireless mobile data network or via any standard telephone line. The **NURIT 2070** can be taken and used in locations where a telephone line is difficult or impossible to install such as outdoor sales areas, parking lots, kiosks, sports stadiums etc...

Merchants with no access to a phone line can now accept credit and debit cards and perform check verification. The **NURIT's** powerful built-in rechargeable and replaceable battery pack can maintain reliable stand-alone operation in excess of 10 hours. The possible financial risk of not being able to verify customer authorization may now be eliminated thus improving cash flow. Designed for ease-of-use, the **NURIT** enables the completion of a typical transaction in less than eight seconds by the use of only a few keystrokes. The large alphanumeric LCD display provides the operator with simple and easy-to-understand guide prompts to complete any type of transaction and facilitates accessing the terminals many powerful features. The easily accessible rear panel connectors allow for the use of a PIN Pad or other general purpose RS-232(serial) communication peripherals.



Features

- Total transaction time in less than eight seconds
- Occupies minimal work space
- Truly portable wireless operation. Can be taken and used anywhere within coverage area
- Communication via built-in radio modem or regular telephone line
- Split-dial operation with AMEX for authorization and settlement

- Multi-host operational capability
- Accepts cash and all major credit and debit cards; provides card authorization and check guarantee
- Easily interconnects with a telephone, PIN pad, PC and other peripherals
- Houses a built-in powerful rechargeable and replaceable battery pack for stand-alone operation exceeding 10 hour
- Integrated impact printer provides fast and accurate receipts with choice of 1 or 2-ply paper
- Automatic feeding system for built-in printer
- Performs fast file transfer and downloading via cable and built-in 2400 baud modem
- User-friendly operational menu system
- Simple easy-to-read alphanumeric LCD display guides the user through each type of transaction
- Large memory capacity for detailed current and past (history) batch reports
- Lipman's Center Management Program allows for control over multiple terminals and enables setting up terminal and third-party host parameters. In addition, this program allows for generating various status and service reports.
- Certified by all major host processors. Additional certifications upon request.

Specifications

Human Interface

- Large 32-character LCD display
- Full alphanumeric capabilities
- Built-in impact printer
- Automatic paper feeder for printer
- Magnetic stripe reader for tracks 1 and 2
- Full header and trailer editing capability
- Easy payment type selection
- Total transaction time in less than 8 seconds
- User-friendly menu system

Processing

- Powerful 32-bit Motorola microprocessor, type EC68000

Memory

- 512 KB **flash memory** for operating system application and parameters
- 256 to 512 KB battery-backed RAM for user data (including RAM disk). Two-month minimum data retention.

Programming


- Fully soft operating system for custom application reprogramming in "C" language
- Complete and detailed hardware/software built-in tests
- Reprogramming possible by downloading over phone
- Operating system support for easy programming
- Major third-party credit, debit and check verification hosts available

Security

- User programming security and authorization access
- Program password protection

Communication

- Built-in radio for wireless communication
- Dial-up modem @ 1200 or 2400 bps for telephone communication (CCITT V.22, V.22bis and BELL 212A)

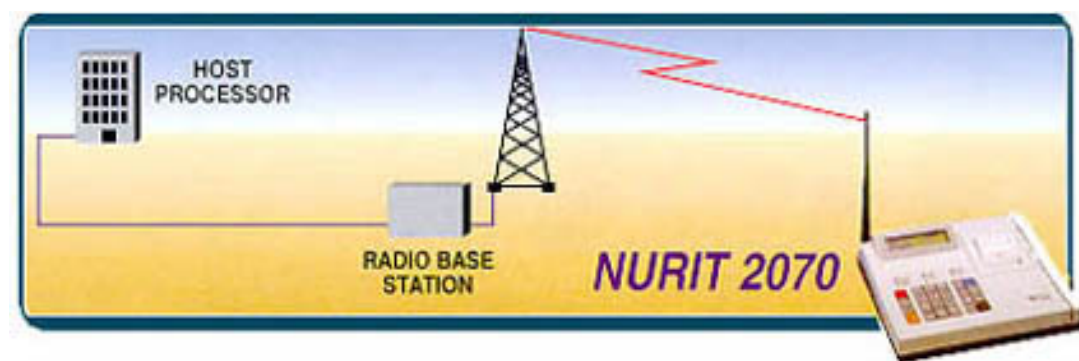

Interfacing

- One general purpose RS-232 port, up to 19.2 K baud
- One PIN Pad port

Printer

Impact dot matrix type; .24 character, 2.5 lines/sec. (approx.); 1 or 2-ply paper capability using normal or pressure sensitive 2.26" (57.5 mm) wide paper

Mechanical Features

Dimensions: 9.06" deep x 10.63" wide x 3.15" high
(23 cm x 27 cm x 8 cm)

Weight: 4.41 lbs (2 kg)
with built-in battery pack

Power Supply

- Supplied AC/DC adapter (15 VDC/2.5A)
- Built-in rechargeable/replaceable Ni-Cd battery pack
- Operates from an external 12 VDC source or optional car lighter

Approvals

Complies and registered with FCC Parts 15 and 68

All features and specifications are subject to change without notice. All trademarks mentioned are registered by their respective owners.
